

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

CONTENTS

1. SCOPE
2. APPLICABLE STANDARDS
3. CLIMATIC CONDITIONS OF THE INSTALLATION
4. GENERAL TECHNICAL REQUIREMENTS
5. GENERAL CONSTRUCTIONS
6. NAME PLATE & MARKING
7. TESTS
8. TYPE TEST CERTIFICATES
9. PRE-DISPATCH INSPECTION
10. INSPECTION AFTER RECEIPT AT STORES
11. GUARANTEE
12. PACKING
13. TENDER SAMPLE
14. TRAINING/DEMONSTRATION (IF APPLICABLE)
15. QUALITY CONTROL
16. TESTING FACILITIES
17. MANUFACTURING ACTIVITIES
18. SPARES, ACCESSORIES AND TOOLS
19. DRAWINGS AND DOCUMENTS

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

20. GUARANTEED TECHNICAL PARTICULARS

21. SCHEDULE OF DEVIATION

1. SCOPE

This specification covers the technical requirements of design, manufacture, testing at manufacturer's works, packing, forwarding, supply, loading and unloading at site/store and performance of 11KV, 1250 AMP outdoor VCB panels complete with all accessories. It is not the intent to specify completely herein all details of the equipment's nevertheless the equipment shall be complete and operative in all respects and shall confirm to the highest standard of engineering, design and workmanship of International Standards/IEC. The scope also covers installation, testing, commissioning of 11KV panels at site along with SCADA interfacing and associated earthing, inter panel wiring. The bidder shall be responsible for engineering and functioning of the complete system, meeting the intent and requirement of this specification and data sheets. Bidder should depute project manager at site for monitoring and coordinating commissioning activity.

It is not the intent to specify completely herein all the details of tech design and construction of material. However, the material shall conform to practices consistent with sound environmental management and local statues. It is also expected that equipment shall comply in all respects to high standards of engineering, design and workmanship and shall be capable of performing in continuous commercial operation in manner acceptable to The TPSODL, who will interpret the meanings of drawings and specification and shall have the power to reject any work or material which, in his judgment is not in accordance therewith. The offered material shall be complete with all components necessary for their effective and trouble-free operation. Such components shall be deemed to be within the scope of Bidder's supply irrespective of whether those are specifically brought out in this specification and/or the commercial order or not.

2. APPLICABLE STANDARDS

The equipment covered by this specification shall unless otherwise stated, be designed, constructed and tested in accordance with latest revisions of relevant Indian/IEC/other applicable standards shall confirm to the regulations of local statutory authorities.

IEC 60068-1:2013	Environmental testing - Part 1: General and guidance
------------------	--

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

IS 2705	Current Transformers
IS 3156	Voltage Transformers
IS 16227-1	Instrument Transformers
IEC 62271-200	High-voltage Switchgear and control gear

IS 694	PVC insulated cables for working voltage up to and including 1100V
IS 2629	Recommended practice for Hot Dip Galvanizing of iron & Steel
IS 2633	Test for uniformity of Zinc Coating
IEC 60445:2021	Identification of equipment terminals, conductor terminations and conductors
IEC 62053-22	Static meter for active energy (Class 0.2s and 0.5s)
IEC 60255	Measuring Relays and Protection Equipment
IEC 60529	Degrees of Protection provided by enclosures (IP Code).
IEC 62271-100	HIGH-VOLTAGE SWITCHGEAR AND CONTROLGEAR: Alternating current circuit breakers.
IEC 62271-200	High voltage switchgear & control gear: Metal-Enclosed Switchgear and Control gear.
IEC 62271-1	High voltage switchgear & control gear: Common specifications
IEC 61010-1	Safety requirement for electrical equipment for measurement and Laboratory use.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

IEC 61850	Communication networks and systems for power utility automation (all parts including IEC 61850-8-1, IEC 61850-9-2)
IEC 61588	Precision clock synchronization protocol
IEC 62351	Power system management and associated information exchange data and communication security.
IEC 60060	High voltage Test technique

3. CLIMATIC CONDITIONS OF THE INSTALLATION:

1	Maximum ambient temperature	50 deg C
---	-----------------------------	----------

2	Max. Daily average ambient temp	35 deg C
3	Min Ambient Temperature	0 deg C
4	Maximum Humidity	95%
5	Average Annual Rainfall	150cm
6	Average No. of rainy days per annum	120
7	Altitude above MSL not exceeding	1000m
8	Wind Pressure	300 Km/hr
9	Earthquakes of an intensity in horizontal direction	equivalent to seismic acceleration of 0.3g
10	Earthquakes of an intensity in vertical direction	equivalent to seismic acceleration of 0.15g (g being acceleration due to gravity)

TPSODL service area has heavy saline conditions along the coast and High cyclonic Intensity winds with speed upto 300 Kmph. The atmosphere is generally laden with mild

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

acid and dust in suspension during the dry months and is subjected to fog in cold months.

4. GENERAL TECHNICAL REQUIREMENTS:

11KV Current Transformer:

Sl. No.	Description	
1	Architecture	Vacuum insulated metal clad
2	Rated voltage	12 KV
3	Service voltage	11 KV
4	Rated voltage	12 KV
S	Rated	50 Hz
6	Rated lightning impulse withstand voltage	75 KV p

7	One Minuit Power frequency withstand voltage	28 KV rms
8	Normal Service Condition	Out Door
9	Internal Arc Protection	IAC -A FLR as per IEC 62271-200. Shall withstand 25kA for 1sec
10	Short time withstand current	25 kA for 3 sec
11	Peak withstand current rating	62.5kA
12	Degree of protection Enclosure/partition/for meter, relay & BCU	Outdoor enclosure: IP55 Internal partitions: IP2X LV compartment: IP54 / devices IP5X
13	Bus Bar	
13.1	Type	Non Extensible
13.2	Bus bar continues current capacity	1250A
13.3	Bus Bar Material	Copper with silver/ tined coted contact

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

13.4	Short time withstand current	25 kA for 3 sec
13.5	Max. Permissible temperature rated normal current	As per IEC
14	CIRCUIT BREAKER FOR IC/OG (INCOMER AND OUTGOING FEEDER)	
14.1	Application /Class	Out door
14.2	Type of circuit	Vacuum (VCB)
14.3	No. of poles	3
14.4	Rated Voltage	12 kV rms
14.5	Rated Insulation Level	11 KV
14.6	Lighting impulse	75 kV peak
14.7	One minute power frequency withstand	28 kV rms
14.8	Rated frequency	50 Hz
14.9	Rated normal current	1250 A

14.10	Rated operating sequence	O-t-CO-T-CO (t=0.3sec, T= 3 min.)
14.11	Max. Spring Charging Time of Motor	10 sec
14.12	Max. Power consumption of Trip & close coils	100 W
14.13	Rated load breaking current (sym)	25 kA rms
14.14	Rated short circuit withstand current	25 kA rms for 3 sec
14.15	Rated short circuit making current	62.5 kA peak
15.0	OPERATING AUXILIARY VOLTAGES	

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

15.1	For Protection relays	24/48V DC		
15.2	For Ant condensation Heaters	220V AC		
15.3	Spring Charging Motor (Universal Motor)	230V AC		
15.4	No. of spare auxiliary contacts with wiring	8NO + 8 NC		
16	VOLTAGE TRANSFORMER			
16.1	Location	Access from Front side of the panel and VT should be for income side		
16.2	Type	Plug In type, Dual ratio		
16.3	Ratio	11KV/ $\sqrt{3}$ / 110/ $\sqrt{3}$ -110/ $\sqrt{3}$ -110		
16.4	Core Details	Core-I	Core-II	Core-III
16.4.i	Accuracy class	0.2	3P	3P
16.4.ii	Burden	50VA	100VA	100VA
	Core -III to be connected as open delta and wiring to be done till IED			

17	CURRENT TRANSFORMER	
	For Metering and Protection	
17.1.1	Ratio	(60A to 1250A, any two available ratios for primary; to be finalized during RO)/1-5 -1 A
17.1.2	Burden & Class	
i)	Core –I	PS core, $V_k \geq 500V$, $R_{ct} \leq 6 \Omega$
ii)	Core –II	0.2S, 10VA; $I_{sf} < 5$
	Core –III	5P20, 10 VA

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

5. GENERAL CONSTRUCTIONS

A. Switchgear

- A.1. All supplied Units shall be fitted with engraved metallic logo of "Tata Power" on the front side as per Annexure.
- A.2. The High Voltage Switchboard shall be metal enclosed and shall comprise of standard prefabricated, Alu zinc sheet units assembled to form a rigid, freestanding, and dead-front structure without any external bracing. As a minimum, 2mm Alu zinc shall be used for all front and rear doors and covers, and 2 mm Alu zinc steel for inter-panel partitions, Frame 3 mm, Removable Gland plate 3 mm, Frame 3 mm, Removable Gland plate 3 mm Wherever required, stiffeners shall be provided to increase stiffness of large size doors and covers Cable termination shall be possible with busbar alive but cable circuit dead and earthed, with proper segregation and shutters/barriers.
- A.3. Cable termination shall be possible with busbar alive but cable circuit dead and earthed, with proper segregation and shutters/barriers.
- A.4. Independent pressure relief devices shall be provided for all HV compartments, i.e. bus bar, cable and breaker compartments and each compartment shall have type test certificate for withstanding internal arc fault.
- A.5. All identical equipment and corresponding parts shall be fully interchangeable.
- A.6. Safety barriers or shutters shall be provided to permit personnel to work safely within an empty compartment with the bus bars energized. The shutters should block the bus & cable compartments.
- A.7. The opening of shutter shall be prevented when the breaker truck is racked out & either main bus or cable compartment is energized. Electrical interlock of cable side shutter & bus side shutter to be provided to prevent opening of shutters when breaker is racked out.
- A.8. The draw out carriage on the switchboard shall have three positions: "Service", "Test" and "Draw out" viz:

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

A.9. "Full in" or "Service" position - In this position both power and control circuits shall be connected. This shall be the normal operating position of the circuit breaker.

A.10. "Test" position - The power contacts shall be disconnected in this position but the control connections shall not be disturbed, it shall be possible to close and trip the breakers in this position.

A.11. "Draw out" Position - both power and control circuits shall be disconnected in this position.

A.12. The circuit breaker shall be lockable in "service" and "test" positions. Automatic safety shutters shall be provided to ensure the inaccessibility of all live parts after the carriage is drawn out.

A.13. There shall be a distinct overall door for the breaker compartment, which can be closed with the carriage in draw out position and it shall be lockable type. All openings on the door shall be with a provision of padlock.

A.14. "Test" position - The power contacts shall be disconnected in this position but the control connections shall not be disturbed, it shall be possible to close and trip the breakers in this position.

A.15. "Draw out" Position - both power and control circuits shall be disconnected in this position.

A.16. All circuit breaker modules of the same rating shall be inter-changeable. Suitable interlocks shall be provided to prevent the following operations:

- "Plugging in" or "drawing out" of a closed breaker.
- "Plugging in" a breaker with the earthing switch closed.
- "Closing" of the earthing switch with the breaker "plugged in".
- Pulling out the auxiliary circuit plug with the breaker in the service position.
- Pushing in the breaker to the service position, with the auxiliary circuit plug not in position.
- All operations behind closed doors.
- It should not be possible to open front door when circuit breaker is closed in service position.
- Mimic to be provided on front fascia of panel.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

- The back door/front door opening shall be possible only when cable is in dead condition.
- Castle key interlock or mechanical interlock to be provided in such a way that for opening of back door / front door castle key shall be required.
- Cable back charge indicating LED on front & rear side of panel is to be provided.

A.17. All hardware shall be corrosion-resistant. All joints and connections of the panel members shall be made by zinc-passivated, or cadmium-plated, high-quality SS bolts, nuts and washers, secured against loosening.

A.18. Suitable removable type eyebolts shall be provided for the lifting of the panel/shipping section. These bolts, when removed shall not leave any opening in the panels.

A.19. Switch board shall be designed for suitable IP rating for outdoor application of defined climatic condition (Type test report to be submitted during detailed engineering). The covers and doors (except outer door of front side) should only be opened when the part of main circuit contained in the compartment being made accessible is dead. Partitions of metal-clad switchgear and control gear shall be metallic and earthed. All the meters, detachable units of relays, relays and BCPUs shall be minimum IP5X (For Low voltage) or with an equivalent provision to completely protect it against dust ingress. All the card of BCPUs must have conformal coating.

A.20. The overall dimension to be provided by the bidder during detailed engineering and as per type tested only.

A.21. All foundation equipment, anchor bolts etc. including the supporting channel shall be furnished by successful bidder along with dispatch of panels. The bottom plates of the panels shall be fitted with removable gland plates not less than 3mm in thickness.

A.22. The T-N-C switch and LRS switch shall be provided with a three-position pistol grip complete with key locking arrangement.

A.23. Indicating instruments and meters shall be at a suitable height so that the lettering on the display can be easily read. Control switches/push buttons and relay resetting knobs shall be conveniently located for ease of operation. The center lines of the switches push buttons and indicating lamps shall be not less than 900 mm from the bottom of the panel. The center lines of relays, meters etc. shall be not less than 450 mm from the bottom of

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

the panel matched. Isolating switch fuse units with MCB shall be provided at the panel for incoming AC and DC supplies. Push buttons shall be made of non-hygroscopic material with shrouds. All other insulator shall also be made of non-hygroscopic material.

A.24. All the HV design shall ensure conformity to IEC-62271-200 Appendix 'A' and must be Type tested for Internal Arc Test. It shall withstand 25 kA for 1 sec. The suppliers shall submit Type Test report from CPRI/ERDA/NSIC/NTH laboratory to prove the above. Auxiliary and control equipment's installed on the panel shall be suitably protected against disruptive discharge from main circuit. Bus bars shall be insulated with heat shrinkable insulating sleeves, wherever bare conductor is employed.

A.25. All indicating lamps shall be of LED type and suitable for continuous operation at 85% to 110% of their rated voltage LED and replaceable from the front of the panel.

A.26. The following indicating lamps with colour shall be mounted over switchgear to indicate important status/alarm of breaker

- Breaker ON----- Red
- Breaker OFF----- Green
- DC Fail -----Amber,
- Space Heater not healthy ---- Blue
- Spring Charge----- Blue
- Trip coil healthy----- White
- Auto trip----- Amber
- Breaker in service-----Red
- Breaker in Test-----White
- PT back charge AC lamps should be provided
- R ph Healthy LED -----RED
- Y ph Healthy LED -----YELLOW

- B ph Healthy LED -----BLUE

A.27. All colour caps shall be similar and interchangeable and all LEDs shall be of same type and ratings. The LED lamps shall be furnished 20% in excess of actual numbers required.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

A.28. All grounding system, special tools and tackles, O&M manuals etc. required for erection, operation, testing and maintenance of switch gear shall be supplied within the quoted price.

A.29. The offered equipment shall be brand new with state of art technology and proven field track record. No prototype equipment shall be offered. Vendor shall ensure availability of spare parts and maintenance support services for the offered equipment for at least for 15 years from the date of supply. Vendor shall give a notice of at least one year to us before phasing out the product/spares to enable the end user for placement of order for spares.

A.30. DC fail supervision relay (80) shall be provided on control and relay panels. DC fail annunciation shall be provided on the panel and loss of DC & trip circuit fail alarm will be suitably annunciate at the panel as well as at the SCADA.

A.31. All the relays and Auxiliaries shall have DC auxiliary supply. Identification of components shall be in agreement with the indication on the wiring diagrams and drawings. If a component is of the plug-in type, an identification mark should be placed on the component and on the fixed part where it is to be plugged-in. Control cables are to be placed in trucking and it should be suitable to accommodate 20% wiring for future modifications.

A.32. The disconnection type details are as follows

a) Control supply in individual bay has to be distributed through MCBs of suitable rating for individual control function like

- Protection Relay
- Each trip circuit – shorting links
- Close circuits
- Spring charging circuit
- Heating, Power point and lighting circuit
- Indication Circuit

- Annunciation circuit

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

b) MCB shall be rated for 10kA short circuit rating. It shall be quick make, quick break, and independent manual type with trip free feature. The DC MCBs and AC MCBs ratings shall be separately mentioned and the panel having AC MCB of higher rating in lieu of DC MCB shall not be accepted. MCB shall have the following

- Over current protection
- ON/OFF Trip position indicators
- Auxiliary contact block (wherever required)

- A.33. Wherever CB contacts are to be multiplied, latch type relay shall be used for contact multiplication. Auxiliary contact multiplier relays shall be reputed make and selected on the basis of continuous Current carrying capacity and rated voltage. The fluctuation in voltage level shall be accounted for (+/-) 10% continuously.
- A.34. Fuse failure relay and trip circuit supervision relay shall be suitably selected, considering burden and auxiliary voltage. External circuitry like compensating resistances will not be accepted. Separate Trip circuit supervision relay not required if it is part of numerical relay.
- A.35. Each switchgear panel shall have 20% spare terminals. The terminals should be droppable type. All equipment's mounted on front side of the panel shall have individual nameplates with equipment designation engraved. Alarms for Trip & non-trip should be separate. The termination links for cables shall be segregated in vertical plane. The bidder shall deliver to site completely assembled, wired, tested panels and only the interconnecting cables shall be connected at site. The Bay Control unit shall have the provision to communicate with the future data concentrator in IEC 60870 -5-103 VDW implementation without any additional hardware.
- A.36. Feeder protection, and transformer differential protection relays shall be considered alongwith the switchgear panel.
- A.37. CT, PT, TRIP, CLOSE CT links shall be different colour-coded for easily identification in breaker panels for all Incoming and Outgoing panels.
- A.38. CT, PT, breaker name plate details shall be embossed on front, back side of breaker panel.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

- A.39. Separate doors section shall be provided for cable and bus compartment separately with handle arrangement.
- A.40. LOTO lock arrangement shall be provided for Cable compartment, Bus compartment and breaker compartment separately.
- A.41. Cable back charge indication shall be provided on Front & Rear side of Cable compartment.
- A.42. The back door opening shall be possible only when cable is in dead condition.
- A.43. Castle key interlock or mechanical interlock to be provided in such a way that for opening of back door castle key shall be required.
- A.44. All TB's in breaker control panel shall be DISCONNECTING Type
- A.45. Extender of breaker plug is required which is used for breaker test in removed position.
- A.46. Dehumidifier to be provided in bus bar & cable compartment. Dehumidifier shall be communicable type with Temperature & humidity data on central server through RS485 port.
- A.47. All auxiliary relays like contact multiplier, Transformer Device relays, Lock out relay shall be fast acting relays with flag indication.
- A.48. Status/indication of all draw out type power equipment's to be made available locally.
- A.49. RYB Nomenclature/paint marking required on all Bus Bar and accessible location.
- A.50. Status contact shall be used for only one application in control schematics.
- A.51. Direct trip from relay BO to Trip coil also to be configured & indicated in the drawing for all panels.
- A.52. Cut off timer to be considered for spring charging motor. Soft drop off timer required in CFC logic in series with Spring Charging BI to keep the Close permissive High till the time spring remains discharged.
- A.53. Separate Status contact shall be used for relay BI's and local indication Lamp.
- A.54. Relay DC supply and Trip Circuit Supervision shall not be under the same DC MCB. Separate MCB for relay to be provided.
- A.55. The shutter mechanism in the breaker cubicle shall operate automatically i.e. when the breaker truck is racked in or out. Shutters provided shall comply with IP2X.
- A.56. The bidder can also consider Centralized Protection System with intelligent merging unit.
- A.57. The bidder shall provide auxiliary relays for Transformer devices – PRV Main tank, OSR – OLTC, Buccholz, MOG Main tank, MOG OLTC, OTI, WTI. (Applicable only for transformer feeder incomer panels; not applicable for general outgoing feeders)
- A.58. The bidder should include TMU on transformer panel. The make of TMU will be Aebarle, Precimeasure, Hitachi & SEL only.
- A.59. All TBs in breaker contrl panel shall be DISCONNECTING Type.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

- A.60. Minimum 46AH , DC power Pack required for DC secondary source for each panel . Power Pack input to be connected with AC control circuit via a MCB of suitable size . Its capacity shall trip more than 20 VCB complete operation.

B. Circuit Breaker

- B.1. Vacuum circuit breakers shall be used in the switchboard. Breaker transport trolleys required for cassette mounted breakers shall be provided for switchboard.
- B.2. The breaker shall be of class M2, E2 [w/o auto reclosing duty], and C2. The breaker shall be encapsulated with no live part exposed within breaker chamber.
- B.3. Vacuum circuit breakers shall be designed to have low switching-over voltage levels and with a long switching life. The interrupter shall be leak-free.
- B.4. The breakers shall have at least 4 normally open (NO) and 4 normally closed (NC) spare auxiliary contacts for purchaser's use. If these are not available, auxiliary relays shall be used to multiply the auxiliary contacts of the breakers.
- B.5. The breakers shall have a motor-operated, spring-charged mechanism. It shall also be possible to charge the springs manually. The closing spring shall get re-charged (for subsequent closing) soon after a closing shot and prior to breaker tripping. In case the limit switch fails to cut out the spring charging motor with the springs fully charged, the motor shall be automatically decoupled.
- B.6. The control circuit shall be suitable for local as well as remote control. Breakers shall be trip-free and shall have an anti-pumping device. The breaker operating duty shall be O0.3 sec-CO-3 min CO.
- B.7. Operating Mechanism: Electric power operating mechanism shall be motor wound spring charged stored energy type. However, manual-operating mechanism may be of the spring charging stored energy type or the spring assisted type. For circuit breakers with electrical power operating mechanism, provision shall also be made for manual spring charging. Closing time of circuit breakers with manual operating mechanism shall be independent of the speed of the operating handle.
- B.8. All stored energy operating mechanism shall be equipped with following features.
- B.9. Failure of springs, vibrations or shocks shall not cause unintended operation of breaker or prevent intended tripping operation.
- B.10. Closing of circuit breakers shall be prevented unless the spring is fully charged.
- B.11. All electrical power operating mechanisms shall be suitable for remote operation and shall be equipped with following features.
- B.12. Provided with universal motor operable on AC or DC control supplies.
- B.13. Provided with emergency manual charging facility. The motor shall be automatically, decoupled (mechanically) once the manual-charging handle is inserted.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

B.14. Closing operation of circuit breaker shall automatically initiate charging of the spring for the next closing operation without waiting for tripping of circuit breaker.

B.15. Closing operation shall be completed once the closing impulse is given and the first device in the control scheme has responded even though the control switch / Push Button is released provided no counter trip impulse is present.

B.16. Circuit breaker trip and closing coils in case of electrically operated breakers and trip coil in case of mechanically operated breakers and circuit breaker indication shall be suitable for satisfactory operation on a control supply system indicated in data sheets/job specification.

B.17. All circuit breakers shall be provided with mechanically operated emergency trip device. This device shall be available on the front of the panel. Mechanically operated 'closing' device shall be provided for all breakers. However mechanical closing shall be inhibited for all circuit breakers in service position.

B.18. The breakers shall be provided with anti-pumping & trip free provision. Each breaker shall be also provided with an operation counter.

B.19. Line PT shall be mounted in a separate draw out carriage. In case of truck mounted breaker, line PT shall be provided in a separate panel

B.20. The complete breaker assembly should have inter-changeability with breakers of identical ratings. Breaker shall be with temperature sensor for monitoring the temperature.

B.21. The Limit switch base in breaker shall have better material having long life.

C. BUS BARS AND CONNECTORS

C.1. The switchboard shall comprise of 3-phase bus bars which shall extend through all units of the switchgear line-up. The main bus bars shall have uniform cross-section throughout their length, and shall be sized to carry continuously the rated current specified in the data sheet.

C.2. Bus bars shall be of high conductivity electrolytic copper supported on insulators made of non-hygroscopic, non-inflammable material with tracking index equal to or more than that defined in Indian standards.

C.3. Bus bars shall be housed in a separate chamber and shall be accessible for inspection. Wire guards shall be provided inside the enclosure to allow visual inspection of bus bars, to avoid accidental contact when the cover is removed.

C.4. Both bus bars and the supports shall be adequately sized and braced to withstand the specified short-circuit current for 1 second. Dynamic stresses shall be calculated on the basis of the specified peak short-circuit current. All bus supports shall be of noncarbonising material, resistant to acids and alkalis.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

- C.5. Bus bars shall be insulated by using heat-shrinkable sleeves. The sleeves shall be rated to withstand the system line-to-line voltage for 1 minute. This shall be verified by a type test in which the line voltage will be applied between the sleeved main bus bar and an aluminium foil wrapped closely around the insulation over a length of at least 500mm.
- C.6. All bus bar joints and all tap-off connections from the main horizontal bus bars shall be provided with removable FRP shrouds.
- C.7. Bus bars shall be prominently marked with red, yellow and blue colour rings for easy phase identification at regular interval and at every power tap off point.
- C.8. The thermal design of the bus bars shall be based on installation of the switchgear in poorly ventilated conditions. The cooling air volume shall take into account only the bus bar enclosure.
- C.9. The hot spot temperature for bus bars including joints at design ambient temperature shall not be formed and shall be as per IEC for normal operating conditions.
- C.10. Only zinc passivated or cadmium plated high tensile strength steel bolts, nuts and washers shall be used for all bus bar joints and supports.
- C.11. The current rating as defined for switchboard and components in data sheet/job specification are for design ambient temperature at site conditions and for being inside the cubicle at fully loaded condition. The vendor shall suitably derate the nominal rating to suit the above condition.
- C.12. It shall be possible to earth all busbar sections in make-proof way.

D. CURRENT TRANSFORMER

- D.1. Current transformers shall be cast-resin insulated. The primary and secondary terminals shall be marked indelibly and easily approachable for termination and testing etc.
- D.2. Current transformers shall conform to IS: 2705. The short-time rating shall be equal to that of the switchboard. They shall be mounted on the stationary part of the switchboard. Protective CTs shall have an accuracy class of 5P and an accuracy limit factor greater than 10. CTs for instruments shall have an accuracy class of 0.2S and an instrument safety factor less than 5.0. One leg of the CTs shall be earthed.
- D.3. Separate CT core of class PS shall be provided for Differential protection.
- D.4. All CTs shall be star connected.
- D.5. Proper access to each set of CTs shall be provided for repair / maintenance
- D.6. The polarity of the primary and secondary windings of each transformer shall be clearly indicated at the respective terminals and in addition labels shall be fitted in a readily accessible position to indicate the ratio, class duty of each transformer. The CT ratios

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

shall be as per the details specified in this specification's; secondary shorting shall be done by black colour 2.5 sq. mm black wires.

- D.7. The TTB should be provided for metering core with droppable links for Energy meter requirement.
- D.8. The TTB details are as follows: DAV make 50 Amps, Screw type, front connection disconnecting type.
- D.9. All the wires should be connected from top and bottom side and fixed top mounted on door.
- D.10. The CTs in the panels & Spare CTs shall be applied with silicone paint.

E. Voltage Transformer

- E.1. Voltage transformers shall be cast-resin insulated. The voltage transformers shall conform to IS: 3156. The voltage transformers shall be of draw out type, and shall be provided with 4 pole miniature circuit breakers with auxiliary contacts on the secondary side.
- E.2. The draw out mechanism shall disconnect the VT from the bus bars. The primary connection shall be disconnected before the VT become accessible. Neutral point of the star connected VTs both on the primary and secondary sides shall be earthed in test position also.
- E.3. The VTs shall have an over-voltage factor of 1.9 times for 30 seconds, and an accuracy class of 0.2 from 10% to 120% of normal voltage. VT selected shall be compatible with system grounding.
- E.4. The primary rated voltage shall be equal to $V/\sqrt{3}$ (phase and neutral).
- E.5. If not otherwise specified, the secondary voltage shall be 110 / Sq.rt of 3 V. The burden and class of accuracy shall be as specified in SLD.
- E.6. Secondary rating of VT to be 110/ $\sqrt{3}$ -110/ $\sqrt{3}$ -110(Meter -Protection -Protection),0.2-3P3P,100VA each. 3rd core of VT (Protection Core) to be connected as open delta and same to be wired to BCPU.
- E.7. A separate truck should be provided for easy racking out/racking in the VT unit.
- E.8. VPIS 2NO+2NC shall be present in feeder with 230V (+or-) 10% DC aux voltage.
- E.9. VT back charging lamp shall be provided on backside of individual breaker panel.
- E.10. The VTs in the panels & Spare VTs shall be applied with silicone paint.

F. PROTECTION METERING & CONTROL

- F.1. All the Bays (Incomer / Outgoing feeder switchgears) shall be provided with Integrated Bay Control, Protection & metering Unit (BCPU).

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

F.2. The BCPUs shall communicate at station level on IEC 61850 protocols and with local and existing remote master on IEC-104 protocol.

F.3. The BCPU shall support fibre-optic port (In and Out) for fault-tolerant fibre optic ring or RJ-45 port for making star connection at switch. Also the BCPU should support centralized parameterization and DR files downloading from remote.

F.4. The BCPUs shall have capability to communicate with multiple masters on independent network.

F.5. Web browsing feature should be available in BCPU.

F.6. Provision of TTB to be made with respect to future revenue meter installation. All the metering CTs/PTs (Bus PT) to be wired up to TTB for revenue meter installation. The meter size is 300X180X180. TTB to be DAV make and 50A rated.

F.7. Bidder to provide all necessary configuration, testing, health monitoring tools (Hardware & Software) for the proposed system.

F.8. All droppable type links of Connect well (CDTTS) or elmax to be provided in the panels.

F.9. The PQM Meters shall be Communicable to RTU on Rs485 MODBUS. This can be eliminated by taking analog data from BCPU, current can be viewed in the

F.10. BCPU itself & huge cabling work can be avoided. Aux supply shall be 24/48V DC (To be confirmed during RO)

F.11. The buses to be supported with suitable insulators in order to avoid the vibrations.

F.12. Overall design should be such that the Bay Control function is handled by the individual relays provided on the respective bays.

F.13. Adequate spare DI /DO provision of BCU should be there for future station miscellaneous signals.

F.14. Separate AC and DC MCB of 16 A to be provided for AC and DC.

F.15. Extendable Circuit Breaker Test Plug for test purpose length of 10 Mts

F.16. Locally copper bar to be installed in Control Panel as an extension of main Earth Bus. All peripherals body earthing are connected to copper bar through green color 2.5 sq mm wire.

F.17. All CT Neutrals shall be grounded individually to the Copper Strip

G. PQM Meter

PQM meters shall be provided by bidders in 11kV incomers. Separate droppable links shall be provided in Metering circuit and space on front door to be provided. Power Quality Meter make are A-Eberle, METRUM, UNIPOWER, Elspec. Communication Port as per the BCPU's communication port. The PQM meter needs to be connected in switch network so that data can be transferred to the central system.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

H. AUXILIARY SWITCHES AND CONTACTORS

Auxiliary switches shall be provided on all circuit breakers for local, remote & SCADA indication, control and interlocking. With each circuit-breaker there shall be supplied all necessary auxiliary switches, contactors and mechanisms for indication, protection, metering, control, interlocking, supervisory and other services. All such auxiliary switches shall be enclosed in dust free housing. Not less than four spare auxiliary switch ways shall be provided with each circuit breaker. All auxiliary switches shall be wired up to a terminal board on the L.V panel of the switchgear whether they are in use or not in the first instance and shall be arranged in the same sequence on all equipment.

I. Relay

- I.1. The switchgear shall have numerical communicable relays designed to disconnect fault circuits with speed and discrimination and shall confirm to IEC 60255-3/IS 3231 or latest revision thereof regarding accuracy and other features.
- I.2. The relay resetting should be such that resetting of the main protection relay should reset all the other auxiliary relays. All the relays shall be communicable with suitable protocol so as to provide all the I/O signals required by the Purchaser.
- I.3. Relays shall support Purchaser's protection philosophy as per protection & automation specifications of Purchaser. However, the substation operation shall comply to the integrated automation requirements with the MASTER SCADA.
- I.4. All plugs in heavy current modules that carry CT circuits shall be equipped with CT shorting features when the module is withdrawn. Suitable facilities shall be provided on each measuring relay to 'disconnect trip outputs and then short and disconnect the IT circuits.
- I.5. BCPU Relay should have at least 24BI and 10BOs.
- I.6. Two number of TCS to be provided / should be included in the Numerical relay.
- I.7. An ANSI 81 frequency relay shall initiate the trip, which must drive an ANSI 86 master-trip (lock-out) relay to ensure breaker remains open until manual reset.
- I.8. The bidder shall further refer to Purchaser's protection and automation philosophy.

J. DC SELECTOR SWITCH

There shall be three position DC selector switch i.e., neutral, DC1 & DC2. In normal supply condition the left side panel & bus section is fed by DC1 Source .and right-side panel is fed from DC2 Source. In case of failure of DC2 source, all panels will be fed by DC1 source. Similarly In case of failure of DC1 source, all panels will be fed by. DC2 source. Cabling required from DCDB to DC selector switch is included in vendor serve. DC MCB of 25 A rating with 'CAC characteristics shall be preferred.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

K. TERMINAL BLOCKS

- K.1. The terminal blocks shall be 1100 V grade, 10 A rated, one piece molded, complete with insulated barriers, stud type terminals, washers, nuts and lock nuts and identification strips. The terminal blocks for CT and VT shall be of disconnecting type. Markings on the terminal strips shall correspond to wire numbers on the wiring diagrams. The terminal blocks shall be fully enclosed with easily removable covers and made of moulded nonflammable plastic material.
- K.2. A minimum clearance of 250 mm between the first row of terminal blocks and the associated cable and plate shall be ensured. Also, the minimum clearance between two rows of terminal blocks shall be 150mm.
- K.3. All spare contacts and terminals of the panel mounted equipment and devices shall be wired to terminal blocks. All the TB's shall be of single Decker type.
- K.4. Acrylic cover for all the TTB's to be provided.
- K.5. The bidder shall further refer to Purchaser protection and automation philosophy.

L. ANTI-CONDENSATION HEATERS

- L.1. Strip type space heaters of 100 W capacity 1 nos shall be provided in breaker compartment, and 200 W capacity 1 nos shall be provided in cable compartment, busbar chamber, LV chamber in each panel to prevent moisture condensation on the wiring and panel mounted equipment. Space heaters shall be rated for 240 V +/- 10 %, 1 phase, 50 Hz supply. Heaters inside the panels shall not be mounted close to the wiring or any panel mounted equipment. Heaters shall be complete with either miniature circuit breakers or with isolating switches, HRC fuse on phase and link on the neutral of the heater supply. Adjustable type thermostat to be supplied too (30 to 110 deg Celsius)
- L.2. An adjustable type communicable hygrotherm (0 to 100% Humidity) shall be provided in the heater control circuit. The indication shall be provided for monitoring the healthiness of Space heater. Heater shall have humidity control and shall be arranged to cut off when cubicle internal humidity exceeds safe value. 'Heater ON' indication shall be also provided. Also, door limit switch and internal lighting shall be provided for LV compartment.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

M. INTERIOR LIGHTING AND RECEPTACLES

- M.1. Each panel shall be provided with a compact LED lighting fixture rated for 240 V +/- 10 %, 1 phase, 50 Hz supply for the interior illumination of the panel during maintenance. The fitting shall be complete with switch-fuse unit and the Switching of the fitting shall be controlled by the respective panel door switch.
- M.2. Each panel shall be provided with a 240 V +/- 10 %, 1 Phase, 50 Hz, 5/15 A, 5 Pin receptacle with switch. The receptacle with switch shall be mounted inside the panel at a convenient location.

N. POWER AND CONTROL SUPPLIES

- N.1. Each control panel shall be provided with necessary arrangement for receiving, distributing, isolating and fusing of DC and AC supplies for various control, signaling, lighting and space heater circuits. The incoming and sub-circuits shall be separately provided with MCBs. Supply monitoring arrangement shall be provided. Selection of the MCB ratings shall be such as to ensure selective clearance of sub-circuit faults. Potential circuits for relaying and metering shall also be protected by MCBs.
- N.2. If auxiliary voltages other than those specified are required, then necessary arrangement shall be made by the bidder within the panel to obtain the desired voltages by providing step-down transformers and inverter/converter, etc. However, it is desired that no other control voltage shall be prevalent in the panel.
- N.3. All fuses shall be HRC cartridge type conforming to relevant standards, mounted on plug-in type fuse bases and cover with locking arrangement for fuse link. All accessible live connection to fuse bases shall be adequately shrouded. Fuses shall have operation indicators for indicating blown fuse condition. Fuse carrier base shall have imprints of the fuse rating and voltage.

O. PANEL WIRING

- O.1. Panels shall be supplied completely wired internally to equipment and terminal blocks and ready for the Purchaser's external cable connections at the terminal blocks. Panel wiring shall be securely supported, neatly arranged by lacing and tying, readily accessible and connected to equipment terminals and terminal blocks. Flame retardant, plastic wiring channels/troughs with strap on plastic covers shall be used for this purpose. When panels are arranged to be mounted adjacent to each other all inter-panel wiring and connections between panels shall be provided by the Bidder.
- O.2. All wiring shall be carried out with 1100 V grade, single core stranded copper conductor wires with PVC insulation. Extra flexible wires shall be used for wiring of devices mounted

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

on moving parts such as swinging panels and doors. The minimum size of the stranded copper conductor used for panel wiring shall be as follows

- i) All circuits except CT and PT circuits: 2.5 mm² per lead grey colour
- ii) CT circuits: 4 mm² per lead with colour coded
- iii) PT circuit: 4 mm² colour coded

O.3. Longitudinal troughs extending throughout the full length of the panels shall be provided for inter panel wiring, for AC and DC supplies, PT circuits, annunciator circuits and other common services. Interconnections to adjacent panels shall be brought out to a separate set of terminal blocks located near the slots or holes meant for taking the interconnecting wires. Arrangements shall permit easy inter-connections to adjacent panels at site and wires for this purpose shall be provided by the bidder looped and bunched properly inside the panels.

O.4. If accidental short circuiting of certain wires is likely to result in malfunction of equipment, such as closing or tripping of a breaker or positive and negative wires, these wires shall not be terminated on adjacent terminal blocks. The unused instrument space on the front or rear of the panels shall be kept clear of wiring, to facilitate addition of devices without rewiring associated portion of the panels.

O.5. Wire terminations shall be made with soldier less crimping type of (ring type lugs for all CT & PT circuits and pin type lugs for other circuits) tinned copper lugs which firmly grip the conductor and insulation. Insulated sleeves shall be provided at all the wire terminations. Engraved core identification plastic ferrules, marked to correspond with panel wiring diagram shall be fitted at both ends of each wire. Ferrules shall fit tightly on the wires and shall not fall off when the wire is disconnected. Lock-in type ferrule shall be provided. There should be provision of cable tray for laying of BCPU looping cable on the top of the switchgear LT compartment.

O.6. Bidder shall be solely responsible for looping all protection relays with DC as per the requirement. Network cable required to communicate BCU/BCPUs with DC shall be under bidder's scope. Looping and networking cable shall be CAT-5 / CAT-6 type. The Bidder shall be solely responsible for the completeness and correctness of the internal wiring and for the proper

O.7. Functioning of the connected equipment. In case the cables are to be routed through trenches, necessary metal clad conduits shall be used.

O.8. Internal wiring to be connected to external equipment shall terminate on terminal blocks. The terminal blocks for CTs and VTs shall be provided with test link and isolating facilities. The CT terminal blocks shall be provided with short circuiting and earthing facilities. Change of CT cores should be possible by linking & delinking of terminals. Switchgear

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

shall have 20% terminals as spare terminals in each panel & should be uniformly distributed in all the terminal blocks and shall be wired.

O.9. The Power interconnections shall be carried out by means of bolted connections with washers. The wiring shall be terminated by using crimping sockets. Under no circumstances the wiring should be under any kind of stress for which sufficient length of control wiring should be provided. Bimetallic washer to be provided at inter metal joints in panels. Note:

1) Two wires shall not be crimped on a single lug.

CT Ferrules shall have reference of CT Core and CT Taps

P. CABLES TERMINATION

P.1. There should be provision of connecting 1 no 11KV, 3CX400 sq. mm, XLPE AI AR cables. There should be proper approach for manpower to work inside the cable compartments of incomer and outgoing section. Ample space for connection for these cables shall be provided at the rear of the switchboards.

P.2. In order to avoid accidental contact in the cable compartment while carrying out inspection by opening the rear cover, a removable expanded metal barrier shall be provided in the cable compartment.

P.3. Unless otherwise specified, the power cable shall enter the switchboard from the bottom.

P.4. Non-magnetic cable gland plates shall be provided for feeders wherever single core cables are used.

P.5. The switchboard shall be supplied complete with supports for clamping outgoing and incoming cables. The head-room available between cable gland plate and terminal lugs shall not be less than 800 mm for 33 kV cables.

P.6. In case the standard panel depth cannot accommodate the specified no. of cables, a rear extension panel of full height shall be provided. An earth strip shall also be brought to this extension panel.


P.7. Unless otherwise specified, all power cables shall enter the switchgear from the bottom.

P.8. A rear viewing window shall be provided on the cable chamber rear cover to inspect cable connection without opening rear cover. The material of this window shall be the same as that used in breaker chamber.


P.9. Cable dropper details shall be as per below:

Incomer / Bus coupler with cable termination

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

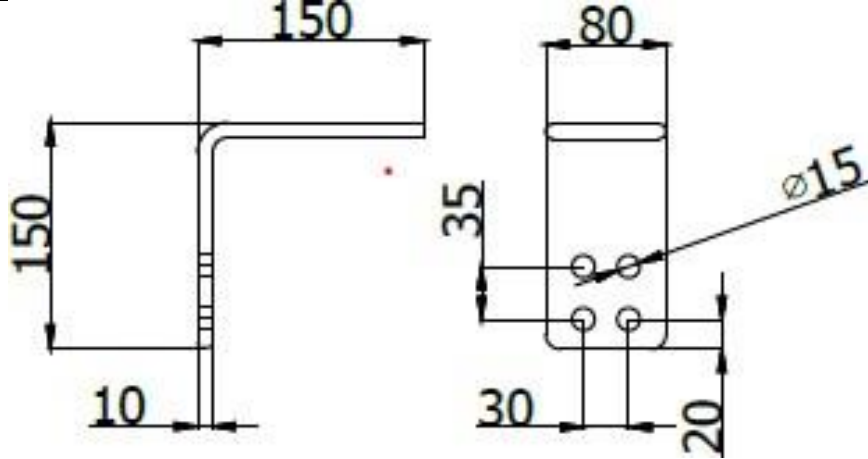

Outgoing / Capacitor / Local transformer:

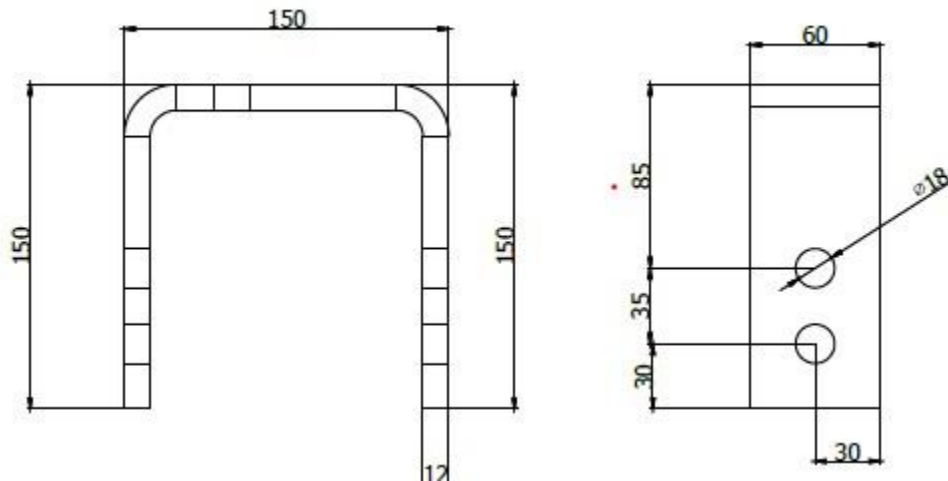

Q. LABELS

- Q.1. All equipment mounted on front and rear side as well as equipment mounted inside the panels shall be provided with individual labels with equipment designation engraved. Also, on the top of each panel on front as well as rear side, large and bold nameplates shall be provided for circuit/ feeder designation. The labels shall be mounted directly below the respective equipment.
- Q.2. All front mounted equipment shall be provided, at the rear also with individual labels engraved with tag numbers corresponding to the ones shown in the panel internal wiring to facilitate easy tracing of the wiring.
- Q.3. Each LED and meter shall be prominently marked. All relays and other devices shall be clearly marked with manufacturer's name, type, serial number and electrical rating data Q.4. Labels both external & internal shall be made on non-rusting metal preferably Aluminium

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

anodized one. Labels shall have white letters on black background. The lettering size shall be 6 mm for panel designation and minimum 3mm for device labels. The label designations shall be subject to the Purchaser's approval.

Q.5. Each switch shall bear clear inscription identifying its function e.g., 'BREAKER', '52A' etc. Similar Inscription shall also be provided on each device whose function is not otherwise defined. If. Any switch device doesn't bear this inscription, separate name plate giving its function shall be provided for it. Switch shall also have clear inscription for each position indication e.g., 'Trip-Neutral-Close', 'ON-OFF', 'R-Y-B-OFF' ETC. Q.6. Danger notice plate as per IS to be provided on each panel.

Section differentiation marking, bus differentiation and phase differentiation marking shall be provided a visible colour coding as per Indian coding will be preferred.

R. EARTHING

R.1. Panels shall be equipped with a separate earth bus securely fixed along with the inside base of panels. When several panels are mounted adjoining each other, the earth bus shall be made continuous and shall be bolted with two bolts. Provision shall be made for future extension of the earth bus. Provision shall be made on the earth bus bars of the end panels for connecting the same to the earthing grid. One bus bar earthing truck & one cable earthing truck shall be supplied per switchboard

R.2. An earthing conductor of 40x10 sq.mm Cu (minimum) shall be provided extending the whole length of switchgear and control gear to sustain the Rated short time withstand current. Each equipment mounted in the panel shall be directly earth pad to this earth bus by distinct connections. Bidder shall provide separate electronic earthing for all LED's. Separate earth bus bar to be run along switchgear for protection earthing of relays and communication equipment and LEDs and shall be insulated from the frame. Two bolts shall be provided for connecting the earthing conductor. Earth bus bar shall be brought out on both left & right ends of the Switchgear Panel to facilitate connection with existing earth connection.

R.3. All metallic cases of relays, instruments and other panel mounted equipments shall be connected to the earth bus by independent copper wires of size not less than 4.0 sq.mm for VT and CT secondary neutral or common lead shall be earthed at one place only, preferably at the terminal blocks where they enter the panel. The colour coding for earthing wires shall be given. Bidder shall provide separate electronic earthing for all IEDs.

R.4. All metallic cases of relays, instruments and other panel mounted equipment shall be connected to the earth bus by independent copper wires of size not less than 2.5 sq.mm. The colour code for earthing wires shall be green. VT and CT secondary neutral or

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

common lead shall be earthed at one place only, preferably at the terminal blocks where they enter the panel. Bidder shall provide separate electronic earthing for all IEDs.

R.5. Looping of earth connections, which would result in loss of earth connection to the other devices when the loop is broken, shall not be permitted. However, looping of earth connections between equipment to provide alternative paths to earth bus shall be provided.

R.6. All live/energized equipment shall have body earth and reference ground via copper strip or Copper wires of minimum 6 sq.mm.

S. PAINTING

All sheet steel work shall be phosphated in accordance with the IS: 6005 "Code of practice for phosphating iron and steel". It should follow the seven tank process. Oil, grease, dirt and swarf shall be thoroughly removed by emulsion cleaning. Rust and scale shall be removed by pickling with dilute acid followed by washing with running water rinsing with a slightly alkaline hot water and drying. After phosphate, thorough rinsing shall be carried out with clean water followed by final rinsing with dilute dichromate solution and oven drying. The phosphate coating shall be sealed with application of two coats of ready mixed, stoved type zinc chromate primer. The first coat may be "flash dried" while the second coat shall be stoved. Thereafter an established painting procedure like electrostatic painting shall be followed for powder coating the panel. The colour shade shall be RAL 7032 (Grey). Minimum paint thickness of 120 micron is required.

T. Asset monitoring system:

Asset Monitoring System is for Condition Based Predictive Maintenance for the Switchgear Panels. It should have interoperability with other make panels & relays, cyber security, user licenses etc.

Sensor Based Remote Maintenance Care system shall have following sensors:

Sensor Type	Sensor Location
Temperature Sensor	Bus Bar Compartment, Breaker Compartment (Upper Arm and Lower Arm), Cable Compartment
Partial Discharge Sensor	Cable Compartment
Humidity Sensor	Cable Compartment
Arc Sensor	Arc Chamber
Room Temperature and Humidity Sensor	Outside the Panel Board inside the Switchgear room

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari
Pollution or Dust Sensor		Outside the Panel Board inside the Switchgear room	

Online condition monitoring, asset health monitoring, data storage, reporting and maintenance support, health prediction of electrical distribution network assets, allow engineers/ managers to gather data and insight that allows them to make more informed decisions about asset health. It should have Circuit Breaker Parameter Monitoring (Input through protection relay), Substation Monitoring Device/Data Concentrator Unit, Data usage & Analytics with inbuilt algorithm.

All the accessories required for successful operation of this system shall be in the bidder's scope. Bidder has to submit BoQ for this system along with tender bid. The license of this system shall be provided for at least 5 years. The complete architecture shall be as per the requirement of TPSODL.

U. GALVANIZING

All galvanizing shall be carried out by the hot dip process, in accordance with IS 2629/ ISO 1460 amended to date. Nut, bolts, washer made of stainless steel of grade: 304. However, high tensile steel nuts, bolts and spring washers shall be hot dip galvanized to service condition four. The zinc coating shall be smooth, continuous and uniform. It shall be free from acid spots and shall not scale, blister or be removable by handling or packing.

U.1. There shall be no impurities in the zinc or additives to the galvanic bath, which could have a detrimental effect on the durability of the zinc coating.

U.2. After galvanizing no drilling or welding shall be performed on the galvanized parts of the equipment except that nut may be threaded after galvanizing.

U.3. To avoid the formation of white rust, galvanized material shall be stacked during transport and stored in such a manner as to permit adequate ventilation. Sodium dichromate treatment shall be provided to avoid formation of white rust after hot dip galvanization. The galvanized steel shall be Subjected to tests as per IS-2633/ BS 729 amended to date.

U.4. The zinc deposition should not be less than 705 grams / meter square of the galvanized surface area / 100 microns / 6 dips.

U.5. Approved Sub-vendor for bought out items:-

Sr. No	Items	Approved sub vendor
1	Epoxy Resin Cast C.T.	Pragati Make /ECS/Huphen Fabricator/Reputed as per OEM

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari
2	Epoxy Resin Cast P.T.	Pragati Make /ECS/Huphen	Fabricator/Reputed as per OEM
3	TTB	DAV make & Model name is	SSFS
4	TB	Connectwell/Elmex	
5	HRC Fuse	C&S / L&T /Equivalent	
6	Space Heater	Girish Make	

6. NAME PLATE & MARKING: -

The equipment shall be provided with durable and legible name plate. A stainless-steel rating plate, of at least 1 mm thickness, shall be fitted to each all the components and operating devices of the switchgear in a visible position and shall carry all the information as specified in the standards. The terminal markings shall also be in line with relevant standards. The letters on the rating plate shall be engraved black on the white/silver background. Fixing screws for outdoor use shall be of stainless steel or any other corrosion resistant metals. The Name plate shall be embossed with "PO no. with date", "PROPERTY OF TPSODL" & "CODE NUMBER" along with the following information.

The following information shall be mentioned on the Name Plate

- I. Manufacturer's name and Country
- II. Type / Model
- III. Serial number
- IV. Month and Year of manufacture V. Month and year of supply
- VI. Rated primary and secondary current
- VII. Rated frequency
- VIII. Highest system voltage
- IX. Service Voltage
- X. Rated Voltage
- XI. Rated insulation level
- XII. Degree of Protection
- XIII. Rated short time withstand current for 3 sec
- XIV. Rated Impulse withstand Voltage
- XV. Warrantee/guarantee clause
- XVI. "SAP CODE NUMBER"
- XVII. PO no. & date
- XVIII. "PROPERTY OF TPSODL "

Property of TPSODL- Not to be reproduced without prior written permission

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

- XIX. Name of the substation and feeder and reference drawing number
- XX. Rated Current of Bus Bar
- XXI. Rated Current of Circuit Breaker
- XXII. Control Voltage

A Danger plate of appropriate size shall also be provided on the enclosure.

CT & PT details to be mentioned at the rear cover of switchgear panel. The name plate of each functional unit shall be legible during normal service. The removable parts, if any shall have a separate nameplate with the data relating to the functional units they belong to, but this nameplate need only be legible when the removable parts is in removed position.

In addition to the above Name Plate Details, Bidder to mention the following details on equipment (paint on the equipment): - Equipment Description-

Rating-

Make-

Sr.

No.-

YOM-

Equipment ID- (Will be written by Tata Power)

(*Font: Arial: Size 20: Polyurethane paint shall be used.)

7. TESTS:

All the Routine, acceptance and Type tests shall be carried out in accordance with the relevant IS/IEC standards. All routine/acceptance tests shall be witnessed by the Purchaser/ his authorized representative. All the components should also be type tested as per the relevant standards. All meters and metering elements in BCU shall also be routine and type tested as per the relevant standards and shall further be tested at site by the successful bidder. For Type test of Numerical relays, control IEDs, and communication equipment, and Factory acceptance test, Protection and automation specification to be followed, relevant IS/IEC has to be followed.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

Bidder shall also be responsible for conducting point to point testing of all gateway configurations on the site (SAT) after the installation.

Bidder shall ensure integrated FAT of switchgear along with SCADA at one location along with RTU functional tests.

Following tests shall be necessarily conducted on the switchgear in addition to the others specified in IS/IEC.

A) For Breaker panels

i) Type Tests

1. Test to verify the protection of person against dangerous electrical effects.
2. Electromagnetic compatibility Tests of Auxiliary and control circuits (Emission & Immunity test)
3. Dielectric Test: Impulse & Power frequency
4. Internal Arc Test
5. Short-time withstand and Peak withstand current test
6. Verification of Degree of Protection.
7. Verify the Insulation level of the equipment including at power frequency test voltage on auxiliary circuits.
8. Temperature Rise tests / Continuous current test as per IEC
9. Short-circuit current making and breaking tests
10. Test to prove the satisfactory operation of the included switching device and removable parts (Mechanical operation test)

ii) Routine Tests

1. Dielectric test on main circuit
2. Tests on auxiliary and control circuits
3. Measurement of the resistance of the main circuit
4. Dimensions and visual checks

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

5. Mechanical Operation test
6. Verification of correct wiring

III) Acceptance Test

1. Dielectric test on main circuit
2. Tests on auxiliary and control circuits
3. Measurement of the resistance of the main circuit
4. Dimensions and visual checks
5. Mechanical Operation test
6. Automation & Protection Philosophy Test along with RTU

B) For Current Transformers

I) Type Tests

1. Short time current Test
2. Temperature rise Test.
3. Lightning impulse tests / Dielectric test
4. Determination of errors or other characteristics according to the requirements of the appropriate designation or accuracy class.

II) **Routine Tests**

1. Verification of terminal marking and Polarity
2. Power frequency dry withstand tests on Primary Windings.
3. Power frequency dry withstand tests on Secondary windings
4. Over Voltage inter-turn test.
5. Partial Discharge tests.
6. Determination of errors or other characteristics according to the requirements of the appropriate designation or accuracy class.
7. For PS class core – Knee point voltage & Excitation current, Secondary winding resistance, Turns ratio.

C) For Voltage Transformers

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

i) Type Tests

1. Short time current Test
2. Temperature rise Test.
3. Lightning impulse tests / Dielectric test
4. Determination of errors or other characteristics according to the

requirements of the appropriate designation or accuracy class. **ii) Routine**

Tests

1. Verification of terminal marking and Polarity
2. Power frequency dry withstand tests on Primary Windings.
3. Power frequency dry withstand tests on Secondary windings
4. Partial Discharge tests.
5. Determination of errors or other characteristic according to the requirements of the appropriate designation or accuracy class.

For CTs & PTs routine test reports from the OEM to be provided.

However, in case any type test is not carried out/carried out at In-house laboratories, the same shall be decided for acceptance as per the mutual agreement between the Purchaser and Bidder.

8. TYPE TEST CERTIFICATES

The bidder shall furnish the type test certificates for the tests as mentioned above as per the corresponding standards. All the tests shall be conducted at CPRI/ERDA laboratories as per the relevant standards. Type test should have been conducted in certified Test Laboratories during the period not exceeding 10 years from the date of opening the bid. In case if type test conducted beyond 10 years, then bidder to certify on letter head of parent OEM that no design change & no manufacturing plant change occurred from type tested product. In the event of any discrepancy in the test reports

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

i.e., any test report not acceptable or any/all type tests (including additional type tests, if any) not carried out, same shall be carried out without any cost implication to Purchaser.

Bids without all type test report shall stand disqualified.

9. PRE-DISPATCH INSPECTION

Equipment shall be subject to inspection by a duly authorized representative of the Purchaser. Inspection may be made at any stage of manufacture at the option of the purchaser and the equipment if found unsatisfactory as to workmanship or material is liable to rejection. The bidder shall grant free access to the places of manufacture to the Purchaser's representatives at all times when the work is in progress. Inspection by the Purchaser or its authorized representatives shall not relieve the bidder of his obligation of furnishing equipment in accordance with the specifications. Material shall be dispatched after specific MDCC (Material Dispatch Clearance Certificate) is issued by the Purchaser.

Following documents shall be sent along with material.

- a) Test reports
- b) MDCC issued by TPSODL
- c) Invoice in duplicate
- d) Packing list
- e) Drawings & catalogue
- f) Guarantee / Warrantee card
- g) Delivery Challan
- h) Other Documents (as applicable)

10. INSPECTION AFTER RECEIPT AT STORE / SITE:

The material received at Purchaser Store / site will be inspected for acceptance and shall be liable for rejection if found different from the reports of the pre-dispatch inspection and one copy of the report shall be sent to Engineering department. If any deviation or anomaly observed at this stage same need to be rectified by bidder at bidders' own cost at earliest.

11. GUARANTEE

Bidder shall stand guarantee towards design, materials, workmanship & quality of process / manufacturing of items under this contract for due and intended performance of the same, as an integrated product delivered under this contract. In

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

the event any defect is found by the Purchaser up to a period of at least 60 months from the date of commissioning or 66 months from the date of last supplies made under the contract whichever is earlier , Bidder shall be liable to undertake to replace/rectify such defects at its own costs, within mutually agreed time frame, and to the entire satisfaction of the Purchaser, failing which the Purchaser will be at liberty to get it replaced/rectified at Bidder's risks and costs and recover all such expenses plus the Purchaser's own charges (@ 20% of expenses incurred), from the Bidder or from the " Security cum Performance Deposit" as the case may be. In case of GP failure, BA shall report at site within 48 hours from intimation and arrange for rectification of fault within a mutually agreed time. In case rectification at site is not possible then alternative arrangement (replacement) to be made by BA within 15 days of intimation of failure.

12. PACKING

Bidder shall ensure that all equipment covered by this specification shall be prepared for rail/road transport (local equipment) and be packed in such a manner as to protect it from damage in transit. The packing should be in such manner that during storage the Panels and its components should not be damaged.

No single use plastic to be used in packing material. Packing should be done with environment friendly recyclable materials.

13. TENDER SAMPLE

Not applicable.

14. TRAINING

The vendor shall include in his offer Training for Tata Power engineers. The training shall cover development, integration, installation and commissioning of both software & hardware components of the system. The training of 2 days shall be given at site by OEM.

The vendor shall provide hands-on training on the system. All required training materials such as system catalogues, test instruments, demo equipment, and simulation jigs, etc. shall be provided by the vendor. The training shall equip the Purchaser's engineers for installation, commissioning, operation and post-warranty maintenance of hardware, software (Operating System, Administration and Applications), protocols and all third-party systems.

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

15. QUALITY CONTROL

The bidder shall submit with the offer, assurance plan indicating the various stages of inspection, the tests and checks which will be carried out on the material of construction, components during manufacture and after finishing, bought out items and fully assembled component and equipment including drives. As part of the plan, a schedule for stage and final inspection within the parameters of the delivery schedule shall be furnished. The Purchaser's or its nominated representative engineer shall have free access to the manufacturer/sub-supplier's works to carry out inspections.

16. TESTING FACILITIES

Bidder shall have adequate in-house testing facilities for carrying out all routine tests & acceptance tests as per relevant International / Indian standard.

17. MANUFACTURING ACTIVITIES

The successful bidder will have to submit GTP & Drawing with 15 days from placement of order/OLA for approval. The date of Code-2 / Code-1 / CAT-A / CAT-B approval given by TATA Power DISCOM will be treated as first day for assessment of LD (if applicable).

18. SPARES, ACCESSORIES & SPECIAL TOOLS / GAUGES

Bidder should provide following mandatory spares along with the bid.

- a) Trip Coil: 1 no.
- b) Closing coil: 1 no.
- c) Spring charging motor: 1 no.
- d) T-N-C Switch: 1 no.
- f) Local/remote selector switch: 1 no
- g) Tulip/ Finger contact: 6 nos
- h) Indication lamps: 50 nos
- i) Auxiliary switches: 10 nos
- j) CTs: 2 nos
- k) VTs: 2 nos
- l) Bus Support insulators: As recommended by OEM

Property of TPSODL - Not to be reproduced without prior written permission

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

- m) Auxiliary contacts (if applicable)
- n) Mechanism-related spare parts recommended by the OEM

In addition to above bidder shall submit recommended list of spares for 5 years of operation, if Any with unit prices and recommended quantity.

18.2 SPECIAL TOOLS & GAUGES:

A list of complete set of special tools and gauges required for erection & maintenance and installation procedure should be submitted. The Bidder shall give an assurance that special maintenance tools & tackles and spares will continue to be available through the life of the equipment, which shall be 25 years minimum. However, the supplier shall give a minimum of 12 months' notice in the event of plan to discontinue manufacture of any component used in this equipment.

Any special maintenance tools & tackles apparatus, parts or tools shall be subject to the same specification, tests and conditions as similar material supplied under the Contract. They shall be strictly interchangeable and suitable for use in place of the corresponding parts supplied with the plant and must be suitably marked and numbered for identification. Spanners and other maintenance equipment provided under this contract shall not be used for the purpose of erection.

19. DRAWINGS & DOCUMENTS

Following drawings & Documents shall be prepared based on Purchaser's specifications and statutory requirements and shall be submitted with the bid:

- a) Completely filled-in Technical Particulars.
- b) General description of the equipment and all components with makes and technical requirements including brochures
- c) General arrangement drawings
- d) Single Line Diagram
- e) Bill of material
- f) Type Test Certificates
- g) Experience List
- h) Foundation fixing drawings along with Foundation Plan and loading details
- i) Manufacturing schedule and test schedule

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

Drawings / documents to be submitted for approval after the award of the contract are as under:

Description	For Approval	For Review	Final
Technical Parameters	√		
General Arrangement Drawings	√		
Single Line Diagram	√		
Typical Mimic diagram	√		√
Schematic / inter logic diagrams	√		√
Bill of Material	√		√
Foundation Plan & loading details	√		√
Manual/Catalogues/drawings for DC, BCU meters, relays, switches, lamps etc.		√	√
Control and Operational Philosophy of		√	
Input/output List		√	
Cable Schedule & interconnection		√	
Programming language manual		√	√
Details of the Communication protocol &		√	√
Equipment wise detailed circuit diagram		√	√
Electronic earthing scheme		√	√
Configuration diagram with functional		√	√
I/O mapping		√	√
3 nos. of working drawings		√	√
3 nos. of as-built drawings		√	√
Relay co-ordination scheme		√	√
Installation / commissioning manual		√	√
Instruction for Use		√	√
Transport Shipping dimension drawing		√	√

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari
QA & QC Plan		✓	✓
Routine, Acceptance & Type Test		✓	✓

All the documents & drawings shall be in English language.

After the receipt of the order, the successful bidder will be required to furnish all detailed drawings of components for Purchaser approval.

Instruction Manuals: Bidder shall furnish two (2) soft copies and three (3) hard copies of nicely bound manuals of Switchgear and Relays (In English language) covering erection and maintenance instructions and all relevant information and drawings pertaining to the main equipment as well as auxiliary devices.

20. GUARANTEED TECHNICAL PARTICULARS

Sr. No	Description	Units	As Furnished by Bidder
1	SWITCHBOARD		
a)	Architecture		
b)	Applicable standard		
c)	Dimensions (In mm),		
d)	Internal Arc Protection		
e)	Normal Service conditions		
f)	Service Voltage	KV	
g)	Rated Voltage	KV	
h)	Rated capacity	MVA	
i)	Rated power frequency withstands voltage (rms)	KV	
j)	Rated impulse withstand voltage (1.2, 50us)	KVP	
k)	Rated Short time withstand current	KA	

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

l)	Rated Peak withstand current	KA	
m)	Busbar material		
n)	Main busbars insulation		
o)	Busbar rated continuous current	A	
p)	Max current Density for Bus bar	A/sq mm	
q)	Max. Permissible temp. rise at		

r)	LOTO lock arrangement shall be provided for Cable compartment, Bus compartment and breaker compartment separately.		
s)	Separate doors section shall be provided for cable and bus compartment separately with handle arrangement		
t)	Degree of Protection for enclosure / Partitions / for meters, relays and BCU		
u)	CT, PT, breaker name plate details shall be embossed on front door panel		
v)	Extendable Circuit Breaker Test Plug for test purpose length of 10 Meters		
w)	Size of panel		
x)	Material of Sheet		
y)	Thickness of Enclosure Sheet / Frame		
z)	Thickness of Doors / Covers Sheet		
aa)	Thickness of Gland Plate (Removable)		
2	CIRCUIT BREAKER		

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

a)	Standard		
b)	Type		
c)	No of poles		
d)	Rated load breaking current (sym)	KA	
e)	Rated short circuit withstand current	KA	
f)	Rated short circuit making current	KA	
g)	Isolation		
h)	Rated Voltage	KV	
i)	Service voltage	KV	
j)	Rated frequency	HZ	

k)	Rated Insulation Level		
i)	Lightning impulse withstand voltage	KVP	
ii)	One min. power frequency withstand voltage	KV (rms)	
l)	Rated operating sequence		
m)	Opening time	millisec ond	
n)	Arcing time	millisec ond	
o)	Total break time	millisec ond	
p)	Making time	millisec ond	
q)	Temperature Rise		
r)	Minimum Tripping time	millisec ond	
s)	Closing time	millisec ond	
t)	Time multiplier Setting		

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

3	OPERATING AUXILIARY VOLTAGES		
a)	Control and signaling voltage		
b)	Spring Charging Motor (Universal Motor)		
c)	Heater and lighting circuits		
d)	No. of spare auxiliary contacts		
4	CURRENT TRANSFORMER		
a)	Type		
b)	Short circuit withstand		
c)	Location		
d)	Ratio		
e)	Burden & Class (Metering and protection)		
i)	Core –II		
ii)	Core –III		
f)	Ratio		

g)	Burden &Class (Differential)		
i)	Core- I		
ii)	Make of CTs		
5	VOLTAGE TRANSFORMER		
a)	Make		
b)	Location		
c)	Mounting arrangement		
d)	Ratio		
e)	Burden &Class		
i)	Core- I		
ii)	Core –II		
lii)	Core-III (to be connected as Open Delta)		
lv)	Ramp provided for rack in/rack out		

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

6	Protection, Control, Metering & Communication		
7	MIMIC Diagram on Relay		
8	Provision of flag indications and contacts for remote annunciation for Self-powered backup relay for incomers		
9	Electrically reset type, High speed relay for tripping.		
10	Anti-pumping Relay		
11	Makes for Auxiliary Relays		
12	Provision of DC fail Relay for each panel		
13	PT back charging lamp shall be provided on backside of individual breaker panel.		
14	OTHERS		
a)	Cable charge indication		
b)	TNC Switch		
c)	Local/Remote switch		
d)	Indication Lamps CB ON/OFF		
e)	Indication Lamps CB Auto Trip		

f)	Indication Lamps for CB Test /Service positions		
g)	Spring charged indication		
h)	Trip circuit. supervision scheme		
i)	MCB for AC		
j)	MCB for DC		
k)	MCB for space heater		
l)	MCB for VT's		

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

m)	Trip alarm scheme with hooter, Accept/Reset PB etc.		
n)	Panel anti-condensation heater with Communicable Hygrotherm		
o)	Panel illumination lamp with switch		
p)	15 A, 3 pin socket.		
q)	Makes of indicating lamps		
r)	Makes of MCB		
s)	Wiring of breaker auxiliary contacts up to terminals		
t)	Makes for Fuses / Fuse bases		
u)	CB handling trolley		
14	BCPU (Bay Control and Protection Units)		
14.1	BCPU Functions		
14.2	Accuracy class of internal energy		
14.3	Input / Output capacity per BCPU		
14.4	System Frequency		
14.5	Rated current		
14.6	Auxiliary Voltage		
14.7	Timing Accuracy		
14.8	Sampling Rate:		
14.9	Sequential Events & Recorder memory		
14.10	Environment		
14.11	Ingress Protection		
14.12	Protection functions for BCPU		

14.13	Additional separate protection if any		
14.14	Feeder protection,		
15	Software tools		

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)		TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)	
				Revision: 03	
				Release Date: 03.02.2026	
Name of the Document		11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)			
Document No.		ENG-EHV-2025	Document Revision No.		01
Prepared By		Reviewed By	Approved By		Issued By
Syed Md. Yousuf Raja		Shailendra Kumar Jaiswal	Ashok Saraf		D.R. Dharmadhikari
15.1	Communication Ports				
15.2	Protocols				
15.3	Recording				
15.4	Level & security of Operation				
15.5	Time Synchronisation				
15.6	Adherence to standards				
15.7	Control function				
15.8	Password protection				
15.9	Configuration tool				
15.10	Integrated checks				
17	Commissioning activity				
17.1	Integrated FAT considered				
17.2	Deputation of Project Manager at site considered				
18	PQM Meter		Incomer		
19	Castle key interlock to be provided in such a way that for opening of back door castle key shall be required.				
20	The back door opening shall be possible only when cable is in dead condition.				
21	Paint Thickness		microns		

21. SCHEDULE OF DEVIATIONS

(TO BE ENCLOSED WITH TECHNICAL BID)

All deviations from this specification shall be set out by the Bidders, clause by Clause in this schedule. Unless specifically mentioned in this Schedule, the tender shall be deemed to confirm the purchaser's specifications:

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

S.NO	CLAUSE NO.	DETAILS OF DEVIATION WITH JUSTIFICATION.

We confirm that there are no deviations apart from those detailed above.

Seal of the Company:

Signature
Designation

Annexure 1:

Inspection Testing Plan

Sr. No.	Test name	Specific value		Test method	
		Clause No.	Reference Standard	Clause No.	Reference Standard
Test on Switchgear					
1	Dielectric test on main circuit	Clause No. 7.2.7.2 and 7.2.8.2	IEC 62271-1	Clause No 9	IEC 60060-1

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

2	Tests on auxiliary and control circuits	Clause No. 6.4.1	IEC 62271-1	Clause No. 7.5.3.2	IEC 62271-1
---	---	------------------	-------------	--------------------	-------------

3	Measurement of the resistance of the main circuit	Table 14	IEC 62271-1	Clause No. 7.4.4	IEC 62271-1
4	Dimensions and visual checks	As per Approved Drawing		IEC 17025	
5	Mechanical operation test	Clause No 7.102	IEC 62271200	Clause No 7.10	IEC 62271-200

Annexure 2: For Line & Bus Coupler

BCPU RELAY			
Binary Inputs		Binary Outputs	
BI1	TRIP RELAY (F86) OPTD.	BO1	SPARE
BI2	LRS IN REMOTE	BO2	UNDER VOLTAGE TRIP TO TC-1
BI3	CONTROL DC MCB FAIL	BO3	RELAY HEALTHY/WATCH DOG
BI4	VT MCB TRIP(PT FAIL)	BO4	PROTECTION TRIP TO MASTER RELAY
BI5	INCOMING DC SUPPLY FAIL	BO5	F86 TRIP RELAY RESET REMOTE
BI6	CB STATUS OPEN	BO6	33/11kV FEEDER REMOTE CLOSE COMMAND
BI7	CB STATUS CLOSE	BO7	VCB OPEN COMMAND FROM REMOTE
BI8	CB SPRING CHARGED	BO8	UNDER VOLTAGE TRIP TO TC-2
BI9	LINE ISO CLOSE	BO9	CLOSE COMMAND FROM HMI
BI10	LINE ISO OPEN	BO10	LINE ISO CLOSE CMD
BI11	EARTH SWITCH CLOSE	BO11	LINE ISO OPEN CMD
BI12	EARTH SWITCH OPEN	BO12	SPARE
BI13	MASTER TRIP RELAY SUPERVISION		
BI14	TC-1 HEALTHY		
BI15	TC-2 HEALTHY		
BI16	TNC CLOSE		

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)		TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)	
				Revision: 03	
				Release Date: 03.02.2026	
Name of the Document		11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)			
Document No.		ENG-EHV-2025		Document Revision No. 01	
Prepared By		Reviewed By		Approved By Issued By	
Syed Md. Yousuf Raja		Shailendra Kumar Jaiswal		Ashok Saraf D.R. Dharmadhikari	
BI17	TNC OPEN				
BI18	AC FAIL				
BI19	STATUS OF POWER PACK				
BI20	SPARE				
BI21	BUS ISOLATOR OPEN				
BI22	BUS ISOLATOR CLOSE				
BI23	SPARE				
BI24	SPARE				

Annexure 3: For PTR Control

BCPU RELAY			
Binary Inputs		Binary Outputs	
BI1	TRIP RELAY (F86) OPTD.	BO1	SPARE
BI2	LRS IN REMOTE	BO2	F86 TRIP
BI3	CONTROL DC MCB FAIL	BO3	RELAY HEALTHY/WATCH DOG
BI4	VT MCB TRIP(PT FAIL)	BO4	PROTECTION TRIP TO MASTER RELAY
BI5	INCOMING DC SUPPLY FAIL	BO5	F86 TRIP RELAY RESET REMOTE
BI6	CB STATUS OPEN	BO6	REMOTE CLOSE COMMAND
BI7	CB STATUS CLOSE	BO7	VCB OPEN COMMAND TO TC-1 FROM REMOTE
BI8	CB SPRING CHARGED	BO8	VCB OPEN COMMAND TO TC-2 FROM REMOTE
BI9	LINE ISO CLOSE	BO9	CLOSE COMMAND FROM HMI
BI10	LINE ISO OPEN	BO10	LINE ISO CLOSE CMD
BI11	LINE EARTH SWITCH CLOSE	BO11	LINE ISO OPEN CMD
BI12	LINE EARTH SWITCH OPEN	BO12	SPARE
BI13	MASTER TRIP RELAY SUPERVISION		
BI14	TC-1 HEALTHY		
BI15	TC-2 HEALTHY		
BI16	TNC CLOSE		
BI17	TNC OPEN		
BI18	AC FAIL		
BI19	F87T RELAY FAULTY		

 TP SOUTHERN ODISHA DISTRIBUTION LIMITED (A Joint Venture of Tata Power and Government of Odisha)	TP SOUTHERN ODISHA DISTRIBUTION LIMITED		F02-(09.07.04)
			Revision: 03
			Release Date: 03.02.2026
Name of the Document	11KV 1250 Amp ICOG Panel for Line-Bus Coupler-PTR(Outdoor)		
Document No.	ENG-EHV-2025	Document Revision No.	01
Prepared By	Reviewed By	Approved By	Issued By
Syed Md. Yousuf Raja	Shailendra Kumar Jaiswal	Ashok Saraf	D.R. Dharmadhikari

BI20	STATUS OF POWER PACK		
BI21	BUS ISOLATOR OPEN		
BI22	BUS ISOLATOR CLOSE		
BI23	SPARE		
BI24	SPARE		

DIFFERENTIAL RELAY			
Binary Inputs		Binary Outputs	
BI1	TR MECH. MOG ALARM	BO1	F86 TRIP
BI2	TR MECH. BUCHHOLZ TRIP	BO2	F87T RELAY FAULTY
BI3	TR MECH. WIND TEMP TRIP	BO3	F87T OPERATED
BI4	TR MECH. OIL TEMP TRIP	BO4	TO CB TC 1
BI5	TR MECH. PRV TRIP	BO5	TO CB TC 2
BI6	TR MECH. BUCHHOLZ ALARM	BO6	SPARE
BI7	TR MECH. WIND TEMP ALARM	BO7	SPARE
BI8	TR MECH. OIL TEMP ALARM	BO8	SPARE
BI9	TR MECH. OSR TRIP	BO9	SPARE
BI10	OLTC PRV TRIP	BO10	SPARE
BI11	TR MECH. PRV ALARM		

BI12	TRIP RELAY (F86) OPTD.		
BI13	BCPU PROTN. RELAY FAULTY		
BI14	SPARE		
BI15	SPARE		
BI16	BCPU TRIP		